

10/533743

Rec'd PTO 04 MAY 2005

PCT/US 03/38072 #2



INVESTOR IN PEOPLE

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

REC'D 25 FEB 2004  
WIPO PCT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed *Andrew Jones*

Dated 29 August 2003

An Executive Agency of the Department of Trade and Industry

BEST AVAILABLE COPY

Patents Form 1/77

Patents Form 1/77  
Rule 16

The  
Patent  
Office

THE PATENT OFFICE

18 DEC 2002

NEWPORT

1/77

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet, from the Patent Office to help you fill in this form)

1. Your reference

JL3436

2. Patent application number  
(The Patent Office will fill in this part)

0229399.1

18DEC02 E771761-2 002806

F01/7700 0.00-0229399.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

3M INNOVATIVE PROPERTIES COMPANY 18 DEC 2002  
P.O. BOX 33427  
ST. PAUL,  
MN 55133-3427  
USA

Patents ADP number (if you know it)

8082232002

If the applicant is a corporate body, give the country/state of its incorporation

DELAWARE, USA

4. Title of the invention

DROP-IN FILTER FOR SPRAY GUN RESERVOIR

5. Name of your agent (if you have one)

Barker Brettell

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

138 Hagley Road  
Edgbaston  
Birmingham  
B16 9PW

Patents ADP number (if you know it)

7442494002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of Filing  
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

Patents Form 1/77

## Patents Form 1/77

9. ☒ the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document  
Continuation sheets of this form

Description 27 + 27

Claim(s) 10 + 10

Abstract 01 + 01

Drawing(s) 05 + 05

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) -

Request for preliminary examination 1  
(*Patents Form 9/77*)

Request for substantive examination -  
(*Patents Form 10/77*)

Any other documents -  
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature *Barker Brettell*

Date

**Barker Brettell**

17.12.02

12. Name and daytime telephone number of person to contact in the United Kingdom

**D. WIGHTMAN**

Tel: 0121 456 1364

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

## DROP-IN FILTER FOR SPRAY GUN RESERVOIR

### Field of the Invention

5 This invention concerns improvements in or relating to filters for liquid supply assemblies. The invention has particular, but not exclusive application to liquid supply assemblies for liquid spraying apparatus such as spray guns, especially hand-held spray guns provided with a liquid supply assembly comprising a reservoir for the liquid to be sprayed  
10 mounted on the spray gun.

### Background of the Invention

Spray guns are widely used to apply a liquid to a substrate in a variety of  
15 industries. In the known spray guns, the liquid is contained in a reservoir attached to the spray gun from where it is fed to a spray nozzle. On emerging from the spray nozzle, the liquid is atomised and forms a spray with compressed air supplied to the nozzle. The liquid may be gravity fed or suction fed or, more recently, pressure fed by an air bleed from  
20 the compressed air line to the reservoir or even from the spray gun itself.

A common application of spray guns is in vehicle body repair shops when re-spraying a vehicle that has been repaired following an accident. A typical paint finish may require application of a primer, base coat, top  
25 coat and a clear lacquer. The presence of contaminants such as solid particles in the liquid to be sprayed can spoil the paint finish and extensive re-working is required to achieve an acceptable paint finish. In some instances, the solid particles may cause blockage of the spray gun itself requiring stripping down and cleaning of the spray gun to remove

the blockage. In addition, the blockage may have an adverse effect on the spray and render the resulting paint finish unacceptable so that extensive re-working is again required to produce an acceptable paint finish. Re-working of the paint finish and, where required, unblocking of the spray gun, adds to costs both in terms of materials and time.

It is already known to provide a filter in the reservoir to remove contaminants as the liquid is withdrawn from the reservoir during operation of the spray gun. Typically, the reservoir has an outlet connected to an inlet on the spray gun and the filter is positioned across or within the outlet. The outlet is usually of comparatively small size compatible with the connection to the spray gun. The presence of solid particles in the liquid added to the reservoir can result in blockage of the filter so that flow of the liquid to the spray gun is restricted or, in extreme cases, prevented altogether.

A reduction in the flow of the liquid to the spray gun may have an adverse effect on the spray and the resulting paint finish may be unacceptable so that re-working is again required to obtain an acceptable paint finish. Moreover, opening of the reservoir is required to remove and replace the blocked filter with a new filter. This is time consuming and may require decanting of liquid remaining in the reservoir which is then returned to the reservoir when the new filter is in place. As a result, there is increased risk of spillage and possible introduction of contaminants into the liquid. Furthermore, some liquids require activation prior to spraying and have a relatively short life after activation. Delays caused by blockage of the filter may result in such liquids being unusable thereby adding further to costs.

It is also known to filter the liquid to remove solid particles prior to or when adding the liquid to the reservoir by employing a filter externally of the reservoir. This avoids the need to provide a filter within the reservoir but is usually time consuming due to the capacity of the filter being less than the rate at which the liquid can be freely poured into the reservoir. In addition, there is an increased risk of spillage if the addition of the liquid exceeds the capacity of the filter causing the liquid to overflow. Also, dust or other airborne contaminants may be entrained in the filtered liquid with the resulting potential problems outlined above.

10

#### Summary of Invention

The present invention is intended to provide an improved filter for liquid supply assemblies used to supply spray guns with resulting benefits and advantages for the user.

15

More specifically, at least one embodiment of the present invention provides a filter for a liquid supply assembly that allows liquid to be added to a reservoir in a simple manner so that contaminants in the liquid can be removed at the time of adding the liquid to the reservoir.

20

Additionally, at least one embodiment of the present invention provides a high flow filter for a liquid supply assembly that permits rapid filling of a reservoir with filtered liquid for supply to a spray gun.

25

Furthermore, at least one embodiment of the present invention provides a filter for a liquid supply assembly that can be left in place when a reservoir containing the filter is attached to a spray gun.

Moreover, at least one embodiment of the present invention provides a filter for a liquid supply assembly that permits a reservoir containing the filter to collapse as liquid is withdrawn from the reservoir.

- 5 Other benefits and advantages of the invention are referred to later herein.

According to a first aspect of the present invention, there is provided a filter for a liquid supply assembly including a reservoir for connection to  
 10 spraying apparatus such as a spray gun, the filter comprising an elongate tubular body closed at one end and open at the other end, the open end being provided with a support collar for location in a filler opening of a reservoir so that the filter body extends away from the opening within the reservoir when liquid is added to the reservoir through the filler opening  
 15 to filter the liquid added to the reservoir.

As used herein, the term "liquid" refers to all forms of flowable materials that can be applied to a surface using a spray gun (whether or not they are intended to colour the surface) including (without limitation) paints,  
 20 primers, base coats, lacquers, varnishes and similar paint-like materials as well as other fluent materials which may be applied in atomised or non-atomised form depending on the properties and/or the intended application of the material and the term "liquid" is to be construed accordingly.

25

By this invention, the tubular body of the filter extends into the reservoir and can be arranged so that the surface area of the filter within the reservoir is optimised compared to the volume of the filter. As a result, the filter can have a high flow capacity that permits rapid filling of the

reservoir with reduced risk of spillage. In this way, liquid can be filtered as it is poured into the reservoir to produce a supply of filtered liquid within the reservoir for supply to the spray gun when the reservoir is connected to the spray gun. Consequently, the filter does not interfere with flow of filtered liquid supplied to the spray gun and the risk of the spray gun being blocked or the surface finish being contaminated with solid particles in the liquid is reduced if not eliminated.

Preferably, the surface area to volume ratio of the tubular body is such that the liquid can be filtered at a rate compatible with the rate of addition of the liquid to provide rapid filling of the reservoir without spillage of the liquid. The surface area to volume ratio may vary depending on the properties of the liquid, for example viscosity, and the size of particles to be removed.

The tubular body of the filter may be comparatively rigid so as to maintain its shape. For example, the body of the filter may comprise a wire mesh. More preferably, however, the tubular body is flexible so that the filter can change shape. For example, the body of the filter may comprise a mesh of a plastics material such as polypropylene, polyester, polyamide (nylon) or any other suitable material. In this way, the filter may be supplied in a compact configuration to reduce space for storage and transportation. Furthermore, where the reservoir is collapsible as liquid is withdrawn in use, the filter may be left in place within the reservoir and conform to the collapsed condition of the reservoir. The mesh can be woven, non-woven or knitted depending on the material, application and requirements such as mesh size and/or uniformity. The mesh may be formed by any suitable method, for example a plastics mesh may be formed by moulding or extrusion.



The filter may have an axial length chosen to provide a suitable flow capacity for the liquid to be filtered. For example, the filter may have an axial length substantially the same as the depth of the reservoir in which it is received. In this way, the available surface area of the filter within the reservoir can be maximised for a given size of filler opening. Moreover, if the reservoir is connected to the spray gun with the filter left in place within the reservoir, as the level of liquid falls in the reservoir, liquid contained in the filter can pass through the mesh body at the surface of the liquid. As a result, the flow of liquid to the spray gun is not reduced or interrupted as the liquid passes through the mesh body.

The support collar may be sized to fit the filler opening and preferably has an external lip at the outer end to locate and retain the collar in the opening. The lip may seat around the marginal edge of the filler opening at the outer end of the wall bounding the filler opening. Alternatively, the filler opening may have a counterbore at the outer end of the wall in which the lip is received to locate against an internal shoulder within the filler opening. In this way, the collar is prevented from passing completely through the filler opening.

The support collar may be made of plastics, such as polypropylene, polyamide (nylon) or polyethylene and is preferably integral with the mesh body of the filter. For example, the support collar may be moulded onto the outer end of the mesh body. In this way, the support collar locates the mesh body of the filter within the reservoir and conforms the open end to the shape of the filler opening. For example, the support collar may be of circular, oval, square or other shape to match the shape of the filler opening.

The filter may be provided with means to assist in maintaining the tubular shape of the mesh body at least when liquid is added to the reservoir. In one arrangement, the filter may be provided with support hoops extending  
5 around the mesh body at axially spaced positions between the ends to maintain the tubular shape of the mesh body. The support hoops may be integral with the mesh body, for example the support hoops may be moulded with the mesh body. Preferably, the support hoops allow the filter to conform to the shape of the reservoir, for example if the  
10 reservoir is constructed to collapse as liquid is withdrawn in use. In another arrangement, the support collar may be connected to a cage that surrounds the mesh body within the reservoir. The cage may comprise a plurality of legs extending from the collar at the open end of the mesh body to a base element at the closed end of the mesh body. The legs are  
15 preferably uniformly spaced apart and may be flexible to allow the filter to conform to the shape of the reservoir, for example if the reservoir is constructed to collapse as liquid is withdrawn in use. Alternatively, the cage may be comparatively rigid to maintain the shape of the filter both when liquid is added to the reservoir and when liquid is withdrawn from  
20 the reservoir in use, for example if the reservoir does not collapse as liquid is withdrawn in use. The cage may be integral with the mesh body, for example, the cage may be moulded with the mesh body.

According to a second aspect of the present invention, there is provided a  
25 liquid supply assembly for use with spraying apparatus such as a spray gun, the liquid supply assembly comprising a reservoir for containing a liquid, the reservoir being connectable in use to a spray gun for supply of the liquid to an inlet of the spray gun and having a filler opening for adding liquid to the reservoir, and a filter for filtering liquid added to the

reservoir through the filler opening, the filter comprising an elongate tubular body closed at one end and open at the other end, the open end being provided with a support collar for location in the filler opening so that the filter body extends away from the opening within the reservoir  
 5 when liquid is added to the reservoir through the filler opening to filter liquid added to the reservoir.

Preferably, the filler opening is provided in an end wall of the reservoir. In one arrangement, the reservoir comprises an open-topped container and  
 10 a lid arranged to close the open end of the container and forming the end wall in which the filler opening is formed.

Advantageously, the lid is provided with an outlet connectable to the spray gun. In one arrangement, the outlet comprises a supply opening  
 15 formed in the lid separately from the filler opening and leading to a tubular spout connectable to the spray gun. In this way, the filter may be left in position within the reservoir when the reservoir is connected to the spray gun.

20 The filler opening may be provided with a releasable closure such as a screw cap that can be removed when it is desired to add liquid to the reservoir and re-attached to close the filler opening when the reservoir is connected to the spray gun. With this arrangement, access to the filler opening may be provided to add liquid to the reservoir when the reservoir  
 25 is connected to the spray gun.

Preferably, the filler opening is larger than the supply opening and both openings are offset from the central longitudinal axis of the reservoir. In this way, access to the filler opening may be improved when the reservoir

is connected to the spray gun to allow liquid to be added to the reservoir without disconnecting the reservoir from the spray gun.

5 In another arrangement, the filler opening is located centrally of the lid and the outlet is provided by a separate connector releasably secured to the lid around the filler opening and having a tubular spout connectable to the spray gun. In this way, the reservoir can be detached from the connector to provide access to the filler opening when it is desired to add liquid to the reservoir. With this arrangement, the filter is removed after  
10 adding the liquid and before the reservoir is re-attached to the connector.

The lid and container may be permanently secured together around the marginal edge of the open of the container. For example the lid and container may be bonded or welded in fluid tight manner to each other.  
15 Alternatively, the lid and container may be releasably secured together in fluid tight manner. For example, the lid may be clamped to the container.

In one arrangement, the container is collapsible as liquid is withdrawn  
20 from the reservoir in use. In this arrangement, the container may have a flexible sidewall and a comparatively rigid base such that the container can be stood upright unsupported on the base and the sidewall is foldable to move the base towards the lid as liquid is withdrawn from the reservoir. The lid is comparatively rigid and may have a dependent skirt  
25 that is located within and secured around the inner marginal edge of the open end of the container so that the container is supported by the lid. As a result, when filled with liquid and attached to the spray gun, the stability of the reservoir is improved assisting handling of the spray gun, especially as liquid is withdrawn causing the reservoir to collapse. The lid

may be provided with an extension sleeve or cage surrounding the container to provide additional support for the container

In another arrangement, the container is received in an outer container to which the reservoir is secured by a collar releasably attached to the outer container over the lid. In this arrangement, the reservoir container acts as a liner for the outer container and, after use, the reservoir can be thrown away and the outer container and collar assembled with another reservoir.

10

Preferably, the reservoir is adapted for releasable connection to the spray gun. For example, the reservoir and spray gun may be provided with co-operating bayonet type formations. In this way, the reservoir can be connected to and released from the spray gun in a simple manner.

15 Alternatively, the reservoir and spray gun may be provided with complementary screw threads.

The spray gun inlet may comprise a socket to receive the spout for connecting the reservoir outlet to the inlet. The spray gun and reservoir may be provided with the co-operating bayonet type formations or with complementary screw threads for releasably securing the reservoir to the spray gun. In one arrangement, the spout and socket are provided with bayonet formations engageable within the socket. For example bayonet lugs on the spout received in bayonet grooves in the socket. In another arrangement, spray gun and reservoir are provided with bayonet formations engageable externally of the socket. For example, the socket may have an external flange co-operable with a pair of hook members arranged on opposite sides of the spout. The socket may be an integral part of the spray gun or it may be detachable. For example, the socket

may be formed by an adaptor permanently or releasably secured to the spray gun.

5 The reservoir may be supplied empty with the filter in place ready for the user to fill with liquid. Alternatively, the filter may be supplied separately for the user to insert in the filler opening before adding liquid. Where the reservoir is collapsible, it may be collapsed to a compact form for storage and transportation and, after use may be discarded in the collapsed condition. The filter is preferably also collapsible so that it can  
10 be supplied in place with the reservoir collapsed and, after use, can be discarded with the reservoir.

Alternatively, the reservoir may be supplied pre-filled with liquid and the spout sealed until it is desired to attach the reservoir to the spray gun.  
15 For example, the spout may be provided with a removable closure or a rupturable membrane. Where provided, the membrane may be ruptured prior to or when the spout is attached to the spray gun. In this arrangement, the reservoir may be provided with the filter in place so that the user does not have to provide a filter when adding liquid to the  
20 reservoir. Alternatively, the filter may be supplied separately for the user to insert if it is desired to add liquid to the reservoir.

Pre-filling may be employed for liquids that can be packaged and stored until required without degrading. Thus, pre-filling may be useful for  
25 liquids that can be supplied ready for use (i.e. without requiring modification to match the colour to an existing colour). For example, base coats in standard colours of a specified shade and/or primers or lacquers that can be supplied in a non-activated form and activated (if necessary) by suitable means such as by exposure to a source of energy,

e.g. ultraviolet radiation, visible light or electrical energy at the time of use.

5 According to third aspect of the present invention, there is provided spraying apparatus comprising a spray gun and a liquid supply assembly according to the second aspect of the invention.

The spray gun may be of the gravity feed, suction feed or pressure feed type.

10

#### Brief Description of the Drawings

Embodiments of the invention will now be described in more detail, by way of example only, with reference to the accompanying drawings in  
15 which:-

Figure 1 is a perspective view of a spray gun for use with a liquid supply assembly according to the present invention;

20

Figure 2 is an end view of the spray gun adaptor shown in Figure 1;

25

Figure 3 is a perspective view of a liquid supply assembly for use with the spray gun of Figures 1 and 2 and incorporating a filter according to a first embodiment of the present invention;

Figure 4 is a perspective view of the filter shown in Figure 3;

Figure 5 is an exploded perspective view of the reservoir shown in Figure 3;

5 Figure 6 is a perspective view of a liquid supply assembly for use with the spray gun of Figures 1 and 2 and incorporating a filter according to a second embodiment of the present invention; and

Figure 7 is a perspective view of the filter shown in Figure 6.

#### 10 Detailed Description of the Exemplary Embodiments

Referring first to Figures 1 to 5 of the drawings, a hand held gravity feed spray gun 1 (Figure 1) has an inlet adaptor 2 (Figures 1 and 2) for releasably connecting a liquid supply assembly 3 (Figures 3 to 5).

15

The gun 1 (Figure 1) comprises a body 4, a handle 5 which extends downwards from the rear end of the body, and a spray nozzle 6 at the front end of the body. The gun 1 is manually-operated by a trigger 7 which is pivotally-mounted on the sides of the gun 1.

20

The inlet adaptor 2 (Figures 1 and 2) is located on the top of the body 4 and communicates with an internal passageway (not visible) which extends through the body 4 to the nozzle 6.

25 In this embodiment, the inlet adaptor 2 is detachable, for example a screw fit in the body 4. In this way, the spray gun 1 can be converted for use with different types of liquid supply assemblies by selection and fitment of the appropriate adaptor 2. Also, a damaged adaptor 2 may be replaced.



In other embodiments (not shown), the inlet adaptor 2 may be an integral part of the body 4 of the spray gun 1. For example, the inlet adaptor 2 may be formed with the body 4 of the spray gun 1 or it may be formed separately and permanently secured to the body 4 of the spray gun 1. Alternatively, the adaptor 2 may be omitted and the liquid supply assembly mounted directly on the body 4 of the spray gun 1.

In use, the gun 1 is connected via a connector 8 at the lower end of the handle 5 to a source of compressed air (not shown) so that, when the user pulls on the trigger 7, compressed air is delivered through the gun to the nozzle 6. As a result, liquid, for example paint, delivered under gravity from the liquid supply assembly 3 to the nozzle 6 is atomised on leaving the nozzle 6 and forms a spray with the compressed air emerging from the nozzle 6.

Referring now to Figures 3 to 5, the liquid supply assembly 3 depicted comprises a reservoir 9 for the liquid (not shown) to be sprayed and a filter 10 for removing solid particles when the liquid is added to the reservoir 9.

The reservoir 9 comprises a container 11 and a lid 12 (Figure 5). The container 11 is of generally cylindrical shape having an open end 11A and a closed end 11B connected by a flexible sidewall 11C. In this embodiment, the container 11 is transparent and is thermo-formed from a single piece of plastics material, preferably polyethylene or polypropylene. The container 11 can be of any suitable size but for use with hand held spray guns, typically has a capacity of 250, 500 or 800 ml for ease of handling and manoeuvrability of the spray gun to which the

reservoir 9 is attached. The sidewall 11C may be provided with markings (not shown) to indicate the volume of liquid in the reservoir 9.

5 The lid 12 is of generally annular shape and in this embodiment is also made of transparent plastics material, preferably polyethylene or polypropylene, by injection moulding or other suitable process. The lid 12 has a dependent skirt 12A inset from the marginal edge 12B. The skirt 12A is received inside the open end 11A of the container 11 and locates against an annular step 11D in sidewall 11C. The marginal edge 10 12B of the lid 12 seats on an external flange 11E at the open end of the container 11. The lid 12 is permanently secured to the container 11 by adhesive or welding between the skirt 12A and sidewall 11C and between the marginal edge 12B and the flange 11E.

15 The lid 12 is comparatively rigid compared to the sidewall 11C of the container and maintains the annular shape of the open end 11A of the container 11. The closed end 11B of the container 11 is also comparatively rigid compared to the sidewall 11C and provides a flat base on which the reservoir 9 can stand, unsupported, in an upright condition 20 with sidewall 11C extended (Figure 3).

The sidewall 11C is flexible and can be made to collapse as liquid is withdrawn from the reservoir 9 for supply to the spray gun 1. As the sidewall 11C collapses, the comparatively rigid base 11B retains its form 25 but moves towards the lid 12. The sidewall 11C collapses in a similar fashion to a plastic bag without being ruptured (e.g. by splitting, tearing or cracking).

- The lid 12 has an upper surface 12C of convex shape and is formed with an inlet or filler opening 12D and an outlet or supply opening 12E. The filler opening 12D has a diameter of approximately half the diameter of the lid 12 and is bounded on the upper surface 12C by an annular spigot 14 having an external screw thread 14A. The filler opening 12D is closed by a detachable screw cap 15 having a skirt 15A with an internal screw thread complementary to the external screw thread 14A of spigot 14.
- 10 The supply opening 12E has a diameter of approximately one sixth the diameter of the lid 12 and is bounded on the upper surface 12C by a cylindrical spout 16. The spout 16 is sized to be a push-fit in a counterbore 17 (Figure 2) at the outer free end of the adaptor 2.
- 15 In this embodiment, the spout 16 has external annular ribs 16A that provide a fluid-tight seal within the counterbore 17. It will be understood, however, that any suitable sealing means may be provided such as one or more O-rings in the counterbore 17 and/or on the spout 16.
- 20 The filler opening 12D is much larger than the supply opening 12E and is made as large as possible to facilitate addition of liquid to the reservoir 9 from the same end as the supply opening 12E. In this way, liquid can be added to the reservoir through the filler opening 12D with the reservoir in an upright position either free standing on the base or with the supply opening 12E attached to the spray gun 1.
- 25

In this embodiment, the ratio of the cross-sectional area of the filler opening 12D to that of the supply opening 12E is approximately 9:1 but it

will be understood that different sizes of the openings 12D,12E may be employed.

5 The openings 12D,12E in the lid 12 are offset from the central longitudinal axis of the reservoir 9 and extend at an angle to the longitudinal axis. In this way, access to the filler opening 12D is improved for adding liquid to the reservoir 9 when the reservoir 9 is attached to the spray gun 1.

10 In this embodiment, opening 12D extends at an angle of approximately 17° and the opening 12E extends at an angle of approximately 13° to the longitudinal axis of the reservoir 9, i.e. at an angle of approximately 30° to each other. It will be understood that one or both openings 12D, 12E may be extend parallel to the longitudinal axis or at any angle to the  
15 longitudinal axis as desired.

The lid 12 is also provided with a pair of hook members 18,18' arranged on opposite sides of and spaced from the spout 16. The hook members 18,18', spout 16 and spigot 14 are aligned on a diameter of the lid 12.

20

Each hook member 18,18' is similar and has an enlarged head 18A,18A' respectively with a chamfer face 18B,18B' terminating at an undercut rib 18C,18C'.

25 The inlet adaptor 2 on the spray gun has an external flange 2A at the outer end for co-operating with the hook members 18,18' to secure releasably the reservoir to the spray gun with the spout 16 received in the counterbore 17.

As best shown in Figure 2, the flange 2A comprises four arcuate recesses 19,20,21,22 uniformly spaced in a circumferential direction around the outer periphery such that the recesses 19,21 are opposite each other and the recesses 20,22 are opposite each other.

5

Each recess 19,20,21,22 leads in a clockwise direction (as viewed in Figure 2) via a cam lobe 19A,20A,21A,22A to a flat 23,24,25,26 that terminates in an abutment 23A,24A,25A,26A.

10

In use, to secure the reservoir 9 to the inlet adaptor 2, the hook members 18,18' are aligned with a pair of opposed recesses 19,21 or 20,22 in the flange 2A. The spout 16 is then pushed into the counterbore 17 so that the enlarged heads 18A,18A' at the distal ends of the hook members 18,18' pass through the aligned recesses 19,21 or 20,22.

15

The reservoir 9 is then rotated relative to the inlet adaptor 2 to cause the hook members 18,18' to ride over the cam lobes 19A,21A or 20A,22A and locate locking ribs 18C,18C' of the heads 18A,18A' behind the flats 23,25 or 24,26. In this way, the reservoir 9 is secured to the inlet adaptor 2 and axial separation of the reservoir 9 from the inlet adaptor 2 is resisted. The reservoir 9 can be detached from the inlet adaptor 2 by reversing the above operation.

20

The offset arrangement of the spout 16 from the central longitudinal axis of the reservoir 9 coupled with the push-twist fastening action to secure the reservoir 9 may result in the reservoir overhanging the body 4 of the spray gun 1 to one side. By providing two pairs of opposed recesses 19,21 and 20,22, the reservoir 9 can be attached using the pair of recesses 19,21 or 20,22 which reduces or eliminates overhang of the

25

reservoir 9. In this way, balance of the assembled gun 1 and reservoir 9 is improved for ease of handling and manoeuvrability.

5 The filter 10 is inserted in the filler opening 12D and extends to the bottom of the reservoir 9 to remove any solid particles from liquid added to the reservoir 9 through the filler opening 12D with the cap 15 removed.

10 As best shown in Figure 4, the filter 10 comprises a tubular mesh body 10A closed at one end and open at the other end. In this embodiment, the mesh body 10A is made of plastics such as polypropylene, polyester or polyamide (nylon) having a mesh size to remove particles of 40 microns or larger, potentially up to 1000 microns. It will be understood that the mesh body 10A may be made of other materials and may have any desired  
15 mesh size to suit any given application.

The filter 10 is provided with a comparatively rigid annular collar 27 at the open end of the mesh body 10A. The collar 27 is made of plastics, for example polyamide (nylon), polypropylene or polyethylene, and is  
20 integral with the mesh body 10A, for example the collar 27 may be moulded onto the mesh body 10A.

The collar 27 is sized to be a push-fit in the spigot 14 and has an external annular lip 27A at the outer end that locates on the outer end of the spigot  
25 14 to position the filter 10 within the reservoir 9 and provide a seal between the screw cap 15 and the filler opening 12D. The mesh body 10A of the filter 10 is generally cylindrical having a maximum diameter similar to the diameter of the filler opening 12D so that the filter can be easily inserted in the filler opening 12D.

In this embodiment, the axial length of the mesh body 10A is such that the closed end is located adjacent to the base of the reservoir 9 when the collar 27 is seated in the spigot 14. In this way, surface area to volume  
5 ratio of the tubular mesh body 10A can be optimised for the mesh size of the filter and the properties of the liquid to be added.

As a result, the filter 10 has a high flow capability that allows liquid to be poured into the reservoir 9 through the filler opening 12D without  
10 overflowing or spilling. This permits rapid filling of the reservoir 9 with liquid that has been filtered to remove solid particles.

The mesh body 10A is flexible so as to be collapsible with the reservoir 9 as liquid is withdrawn from the reservoir 9 in use. In this way, the filter  
15 10 can be left in place within the reservoir 9 after filling and the screw cap 15 attached to close the filler opening 12D and secure the filter 10 in position.

The outlet opening 12E is separate from the filler opening 12D and the  
20 presence of the filter 10 in the reservoir 9 does not interfere with flow of liquid to the spray gun 1 through the spout 16. Also, the reservoir 9 contains filtered liquid for supply to the spray gun 1 so that the flow of liquid is not dependent on the filtering the liquid at the time it is withdrawn from the reservoir 9.

25

As the level of the liquid falls in the reservoir 9, liquid contained in the mesh body 10A can pass through the mesh body 10A into the reservoir 9 at the surface of the liquid in the reservoir 9. As a result, the supply of

the liquid to the spray gun 1 is not affected by filtering of the volume of liquid contained in the filter body 10A when the reservoir 9 is filled.

5 In an alternative arrangement, the filter 10 may be removed after filling with liquid and the screw cap 15 attached to close the filler opening 12D prior to attaching the reservoir 9 containing filtered liquid to the spray gun 1.

10 By leaving the filter 10 in the reservoir 9, the risk of spillage when the filter 10 is removed is avoided. Also, if it is desired to top-up the reservoir 9 with more liquid, the screw cap 15 can be removed and the liquid poured into the reservoir through the filler opening 12D with the filter 10 already in place to remove any solid particles.

15 Referring now to Figures 6 and 7, a liquid supply assembly is shown having an alternative filter according to the invention. For convenience, like reference numerals in the series 100 are used to indicate parts corresponding to the previous embodiment.

20 As shown in Figure 7, the mesh-body 110A of the filter 110 is arranged inside a support cage 128 integral with the collar 127. In this embodiment, the support cage 128 comprises four legs 128A extending axially from the collar 127 and joined to a base ring 128B at the closed end of the filter body 110A. The support cage 128 helps to maintain the  
25 tubular shape of the filter body 110A when liquid is added to the reservoir 109.



The surface area of the mesh body 110A is again optimised compared to the volume of the filter 110 to provide a high flow capability for rapid filling of the reservoir 109 with filtered liquid.

- 5 In this embodiment, the legs 128A are comparatively rigid to provide strengthen and maintain the tubular shape of the mesh body 110A. With this arrangement, after filling the reservoir 109, the filter 110 is removed before the screw cap 115 is attached to close the filler opening 112D prior to securing the reservoir 109 to the spray gun 1 (Figure 1). In this way, the filter 110 does not interfere with collapse of the reservoir 109 as liquid is withdrawn in use. In other respects, the construction and operation of this embodiment is similar to the previous embodiment and will be understood from the description already given.
- 10
- 15 In a modification (not shown), the cage 128 may be replaced by a plurality of annular support hoops (not shown) that extend around the mesh body 110A at axially spaced positions. The hoops provide strength to maintain the tubular shape of the mesh body 110A when liquid is added to the reservoir 109 but allow the filter 110 to collapse with the reservoir 109 as liquid is withdrawn in use. In this way, after filling with liquid, the reservoir 109 can be connected to the spray gun with the filter 110 left in place within the reservoir 109. Alternatively, the cage 128 may be formed to allow the filter 110 to collapse, for example the legs 128 could be flexible.
- 20

25

It will be appreciated from the foregoing description of exemplary embodiments that by having the filler opening 12D, 112D separate from the supply opening 12E, 112E liquid can be added to the reservoir 9, 109 with the reservoir 9, 109 connected to the spray gun 1. For this, the

spray gun 1 is inverted from its normal position of use so that the reservoir 9, 109 is arranged with the lid 12, 112 uppermost to drain any liquid remaining in the reservoir 9, 109 to the bottom (the reservoir 9, 109 may have to be extended from the collapsed condition resulting from withdrawal of liquid during spraying). The screw cap 15, 115 can then be removed to add more liquid without risk of spillage. The cap 15, 115 can then be re-attached and the spray gun 1 re-inverted to its normal position of use for continued spraying.

- 10 Alternatively, the reservoir 9, 109 may be detached from the spray gun 1 and stood upright on a flat surface with the lid 12, 112 uppermost prior to removing the screw cap 15, 115 to add more liquid (the reservoir 9, 109 may have to be extended from the collapsed condition resulting from withdrawal of liquid during spraying). The cap 15, 115 can then be re-secured and the reservoir 9, 109 re-attached to the spray gun 1 to continue spraying.

- On completion of spraying, the reservoir 9, 109 may be detached from the spray gun 1 and any paint remaining in the reservoir 9, 109 may be stored temporarily by closing off the supply hole 12E, 112E with any suitable means. The reservoir 9, 109 may then be re-attached to the spray gun 1 to use the remaining liquid. Alternatively, the reservoir 9, 109 may be discarded together with the filter 10, 110 after closing off the supply hole 12E, 112E.

25

It will be understood that the invention is not limited to the embodiments above-described.

For example, the arrangement of the filler opening separate from the supply opening allows the filter to be left in situ when attaching the reservoir to the spray gun and enables liquid to be added with the reservoir attached to the spray gun. The filler opening and supply opening  
5 may be provided in the lid at the same end of the reservoir. Alternatively, the filler opening may be provided in a sidewall or base wall of the container and the supply opening in the lid.

In another arrangement, the lid may be provided with a centrally located  
10 filler opening to receive the filter and a separate connector having an outlet spout for securing the reservoir to the spray gun. The connector is releasably attached to the lid around the filler opening and converts the lid for connection to the spray gun after the liquid has been added to the reservoir. With this arrangement the reservoir can be detached from the  
15 connector and liquid added to the reservoir with the filter inserted in the filler opening. The filter is then removed and the reservoir attached to the connector for securing the reservoir to the spray gun.

The lid and container may be permanently secured together as described.  
20 Alternatively, the lid and container may be releasably secured together. For example, the container may form a liner for a rigid outer container with the lid being releasably secured to the liner by a collar screwed onto the outer container. A liquid supply assembly of this type forms the subject matter of our International patent application published on 30 July  
25 1998 under No. WO 98/32539 the contents of which are incorporated herein by reference.

The reservoir may be collapsible as liquid is withdrawn. In this arrangement, the filter may be flexible so as to be collapsible with the

reservoir when the filter is left in place and the reservoir attached to the spray gun. Alternatively, the filter may be stiff compared to the reservoir so that the filter has to be removed before attaching the reservoir to the spray gun.

5

The reservoir may be supplied empty with the filter in place so that the user only has to remove the screw cap and add the liquid to be sprayed. Alternatively, the filter may be supplied separately for insertion in the filler opening by the end user prior to adding liquid.

10

Where the reservoir is collapsible, it may be supplied empty in a collapsed condition so as to reduce the space required for storage and transportation with the end user extending the reservoir before adding liquid. In this arrangement, the reservoir may be supplied with the filter in place in a collapsed condition or separate for insertion in the filler opening by the end user.

15

In another arrangement, the reservoir may be supplied pre-filled with liquid. In this arrangement, the filter may be supplied separately for insertion by the end user if it is desired to add liquid to the reservoir in use. Alternatively, the reservoir may be supplied with the filter in place so that liquid can be added by the end user when required.

20

In a further arrangement, the reservoir may be rigid. With this arrangement, the filter may be flexible or stiff and may be left in place when the reservoir is attached to the spray gun. The reservoir may be supplied empty or pre-filled with liquid and with the filter secured in place or separate. With this arrangement, an air vent is required in the liquid delivery system to allow liquid to be withdrawn from the reservoir

25

in use, for example the reservoir may be provided with an air hole that can be opened when the reservoir is connected to the spray gun.

Other modifications and improvements will be apparent to those skilled in the art.

As will now be apparent, the present invention provides a high flow, drop-in filter for use with a liquid supply assembly for spraying apparatus such as spray guns to permit rapid filling of the reservoir. In this way, the liquid is filtered on being added to the reservoir to provide a supply of filtered liquid for delivery to the spray gun.

Furthermore, by providing a filler opening separate from the supply opening, the filter can be left in place when the reservoir is attached to the spray gun so as to be available if it is desired to top-up the reservoir with more liquid.

Additionally, by providing the filter with a flexible mesh body, the filter can be employed both in reservoirs that are collapsible as liquid is withdrawn and in reservoirs that are rigid.

It will also be appreciated that the exemplary embodiments described herein are intended to illustrate the diverse range and application of the invention and that features of the embodiments may be employed separately or in combination with any other features of the same or different embodiments.

Moreover, while the exemplary embodiments described and illustrated are believed to represent the best means currently known to the applicant, it

will be understood that the invention is not limited thereto and that various modifications and improvements can be made within the spirit and scope of the invention as generally described herein.

CLAIMS

1. A filter for a liquid supply assembly including a reservoir for connection to spraying apparatus such as a spray gun, the filter  
5 comprising an elongate tubular body closed at one end and open at the other end, the open end being provided with a support collar for location in a filler opening of a reservoir so that the filter body extends away from the opening within the reservoir when liquid is added to the reservoir through the filler opening to filter the liquid added to the reservoir.  
10
2. A filter according to claim 1 wherein the tubular body of the filter has surface area to volume ratio that is optimised for a given application to provide a high flow capacity that permits rapid filling of the reservoir
- 15 3. A filter according to claim 1 or claim 2 wherein the volume of the tubular body of the filter is substantially less than the volume of the reservoir such that a major portion of liquid contained in the reservoir is filtered on being added to produce a supply of filtered liquid within the reservoir for supply to the spray gun when the reservoir is connected to  
20 the spray gun.
4. A filter according to any one of the preceding claims wherein the tubular body of the filter is comparatively rigid so as to maintain its shape.  
25
5. A filter according to claim 4 wherein the tubular body of the filter comprises a wire mesh.

6. A filter according to any one of claims 1 to 3 wherein the tubular body of the filter is flexible so that the filter can change shape.
7. A filter according to claim 6 wherein the tubular body of the filter  
5 comprises a woven, non-woven, or knitted mesh.
8. A filter according to claim 7 wherein the mesh is made of plastics.
9. A filter according to claim 8 wherein the tubular body is made by  
10 moulding or extrusion.
10. A filter according to any one of the preceding claims wherein the tubular body of the filter has a cross-section such that the filter can be dropped into the reservoir to locate the support collar in the filler  
15 opening.
11. A filter according to any one of the preceding claims wherein the tubular body of the filter has an axial length substantially the same as the depth of the reservoir in which it is received.
12. A filter according to any one of the preceding claims wherein the support collar is sized to fit the filler opening and has an external lip at the outer end that seats around the marginal edge of the filler opening to locate and retain the collar in the opening.  
20
13. A filter according to any one of the preceding claims wherein the support collar is integral with the tubular body of the filter.  
25



14. A filter according to any one of the preceding claims wherein the support collar is made of plastics.

15. A filter according to claim 14 wherein the support collar is  
5 moulded onto the open end of the mesh body.

16. A filter according to any one of the preceding claims wherein the support collar is connected to a cage that surrounds the tubular body of the filter within the reservoir.

10

17. A filter according to claim 16 wherein the cage assists in maintaining the shape of the tubular body of the filter.

18. A filter according to claim 16 or claim 17 wherein the cage  
15 comprises a plurality of legs extending from the support collar at the open end of the tubular body to a base element at the closed end of the tubular body.

19. A filter according to claim 18 wherein the legs are uniformly  
20 spaced apart in a circumferential direction.

20. A filter according to any one of claims 16 to 19 wherein the cage is flexible to allow the filter to conform to the shape of the reservoir.

21. A filter according to any one of claims 16 to 19 wherein the cage  
25 comparatively rigid to maintain the shape of the filter.

22. A filter according to any one of claims 1 to 14 wherein the tubular body is provided with at least one annular support hoop spaced from the collar.
- 5 23. A filter according to claim 22 wherein the support hoop allow the tubular body to collapse.
24. A liquid supply assembly for use with spraying apparatus such as a spray gun, the liquid supply assembly comprising a reservoir connectable  
10 to an inlet of spraying apparatus and having a filler opening for adding liquid to the reservoir, and a filter according to any one of the preceding claims for insertion in the filler opening to filter liquid added to the reservoir.
- 15 25. A liquid supply assembly for use with spraying apparatus such as a spray gun, the liquid supply assembly comprising a reservoir for containing a liquid, the reservoir being connectable in use to a spray gun for supply of the liquid to an inlet of the spray gun and having a filler opening for adding liquid to the reservoir, and a filter for filtering liquid  
20 added to the reservoir through the filler opening, the filter comprising an elongate tubular body closed at one end and open at the other end, the open end being provided with a support collar for location in the filler opening so that the filter body extends away from the opening within the reservoir when liquid is added to the reservoir through the filler opening  
25 to filter liquid added to the reservoir.
26. A liquid supply assembly according to claim 24 or claim 25 wherein, the filler opening is provided in an end wall of the reservoir.

27. A liquid supply assembly according to claim 26 wherein, the reservoir comprises an open-topped container and a lid arranged to close the open end of the container and forming the end wall in which the filler opening is formed.

5

28. A liquid supply assembly according to claim 27 wherein, the lid is provided with an outlet connectable to the spray gun.

29. A liquid supply assembly according to claim 28 wherein, the outlet  
10 comprises a supply opening formed in the lid separately from the filler opening and leading to a tubular spout connectable to the spray gun.

30. A liquid supply assembly according to claim 29 wherein the filter  
15 can be left in position within the reservoir when the reservoir is connected to the spray gun.

31. A liquid supply assembly according to claim 29 or claim 30  
20 wherein the filler opening is provided with a releasable closure that can be removed when it is desired to add liquid to the reservoir and re-attached to close the filler opening when the reservoir is connected to the spray gun.

32. A liquid supply assembly according to claim 31 wherein the closure  
25 is removable to allow liquid to be added to the reservoir when the reservoir is connected to the spray gun.

33. A liquid supply assembly according to any one of claims 29 to 32 wherein, the filler opening is larger than the supply opening.

33

34. A liquid supply assembly according to claim 33 wherein both openings are offset from the central longitudinal axis of the reservoir.

35. A liquid supply assembly according to claim 28 wherein the filler opening is located centrally of the lid and the outlet is provided by a separate connector releasably secured to the lid around the filler opening and having a tubular spout connectable to the spray gun.

36. A liquid supply assembly according to claim 35 wherein the reservoir can be detached from the connector to provide access to the filler opening when it is desired to add liquid to the reservoir.

37. A liquid supply assembly according to claim 36 wherein the filter is removed after adding the liquid and before the reservoir is attached to the connector.

38. A liquid supply assembly according to any one of claims 27 to 37 wherein the lid and container are permanently secured together around the marginal edge of the open of the container.

20

39. A liquid supply assembly according to claim 38 wherein the lid and container are bonded or welded in fluid tight manner to each other.

40. A liquid supply assembly according to any one of claims 27 to 37 wherein the lid and container are releasably secured together in fluid tight manner.

25

41. A liquid supply assembly according to claim 40 wherein the lid is clamped to the container.

42. A liquid supply assembly according to any one of claims 27 to 41 wherein the container is collapsible as liquid is withdrawn from the reservoir in use.

5

43. A liquid supply assembly according to claim 42 wherein the container has a flexible sidewall and a comparatively rigid base.

10 44. A liquid supply assembly according to claim 43 wherein the sidewall is foldable to move the base towards the lid as liquid is withdrawn from the reservoir.

45. A liquid supply assembly according to any one of claims 42 to 44 wherein the lid is comparatively rigid.

15

46. A liquid supply assembly according to claim 45 wherein the lid has a dependent skirt that is located within and secured around the inner marginal edge of the open end of the container.

20 47. A liquid supply assembly according to claim 45 or claim 46 wherein the lid is provided with an extension sleeve or cage surrounding the container to provide support for the container

25 48. A liquid supply assembly according to any one of claims 42 to 46 wherein the container is received in an outer container to which the reservoir is secured by a collar releasably attached to the outer container over the lid.

49. A liquid supply assembly according to claim 48 wherein the reservoir container acts as a liner for the outer container and, after use, the reservoir can be thrown away and the outer container and collar assembled with another reservoir.
50. A liquid supply assembly according to any one of claims 24 to 49 wherein the reservoir is adapted for releasable connection to the spray gun.
51. A liquid supply assembly according to any one of claims 24 to 50 wherein the reservoir is supplied empty.
52. A liquid supply assembly according to any one of claims 24 to 50 wherein the reservoir is supplied pre-filled with liquid.
53. A liquid supply assembly according to claim 51 or claim 52 wherein the reservoir and filter are supplied separately for insertion of the filter in the filler opening.
54. A liquid supply assembly according to claim 51 or claim 52 wherein the reservoir and filter are supplied pre-assembled with the filter located in the filler opening.
55. Spraying apparatus comprising a spray gun and a liquid supply assembly according to any one of claims 24 to 54.
56. Spraying apparatus according to claim 55 wherein the spray gun is a gravity feed spray gun.

57. Spraying apparatus according to claim 55 wherein the spray gun is a suction feed spray gun.
58. Spraying apparatus according to claim 55 wherein the spray gun is a pressure feed spray gun.
59. Spraying apparatus according to any one of claims 55 to 58 wherein the reservoir and spray gun are provided with co-operating bayonet type formations for releasably securing to the reservoir to the spray gun.
60. Spraying apparatus according to any one of claims 55 to 58 wherein the reservoir and spray gun are provided with complementary screw threads for releasably securing the reservoir to the spray gun.
61. Spraying apparatus according to any one of claims 55 to 60 as dependent on claim 25 wherein the spray gun has a socket to receive the spout for connecting the reservoir outlet to the inlet.
62. Spraying apparatus according to claim 61 wherein the socket is an integral part of the spray gun.
63. Spraying apparatus according to claim 61 wherein the socket is detachable from the spray gun.
64. Spraying apparatus according to claim 63 wherein the socket is formed by an adaptor releasably secured to the spray gun.


65. A filter substantially as hereinbefore described with reference to Figure 4 of the accompanying drawings.
66. A filter substantially as hereinbefore described with reference to Figure 7 of the accompanying drawings.
67. A liquid supply assembly substantially as hereinbefore described with reference to Figures 3 to 5 of the accompanying drawings.
68. A liquid supply assembly substantially as hereinbefore described with reference to Figures 6 and 7 of the accompanying drawings.
69. A spray gun in combination with a liquid supply assembly substantially as hereinbefore described with reference to Figures 1 to 5 of the accompanying drawings.
70. A spray gun in combination with a liquid supply assembly substantially as hereinbefore described with reference to Figures 1,2,6 and 7 of the accompanying drawings.



## DROP-IN FILTER FOR SPRAY GUN RESERVOIR

A liquid supply assembly for use with a spray gun (Figure 1) comprises a reservoir 9 provided with a drop-in filter 10 for removing solid particles from liquid added to the reservoir 9. The reservoir 9 has a lid 12 with an outlet opening 12E connectable via a spout 16 to the spray gun and a separate inlet opening 12D in which a support collar 27 of the filter 10 is located. The filter 10 comprises a tubular mesh body 10A having an open end and a closed end. The open end is connected to the support collar 27 and the mesh body 10A extends away from the inlet opening 12D within the reservoir 9. The mesh body 10A is sized to pass through the filler opening 12D and has a high flow capacity to permit rapid filling of the reservoir 9. The filter 10 may be left in place when the reservoir 9 is connected to the spray gun and the reservoir 9 may be discarded together with the filter 10 after use.

Figure 3

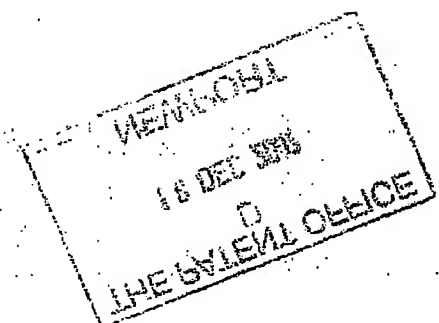

115

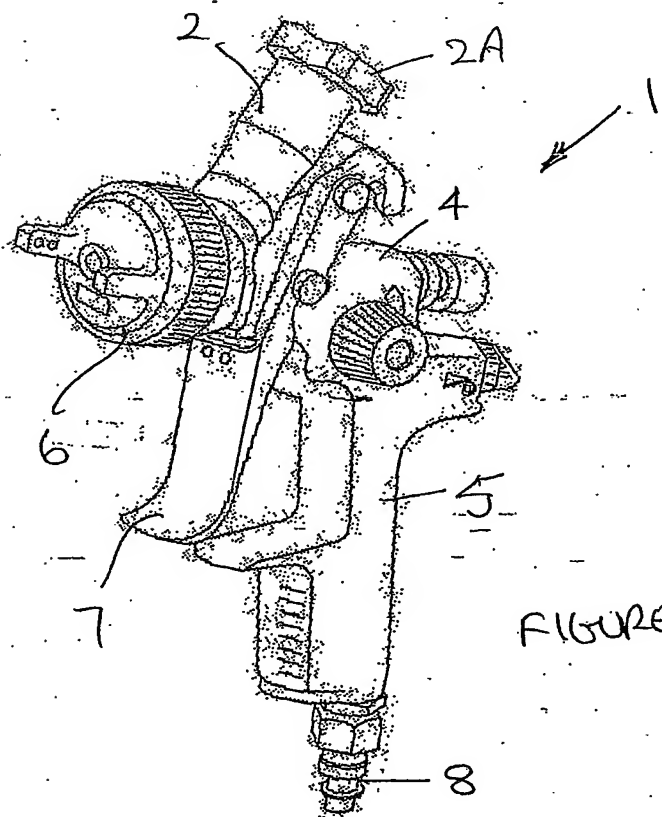


FIGURE 1

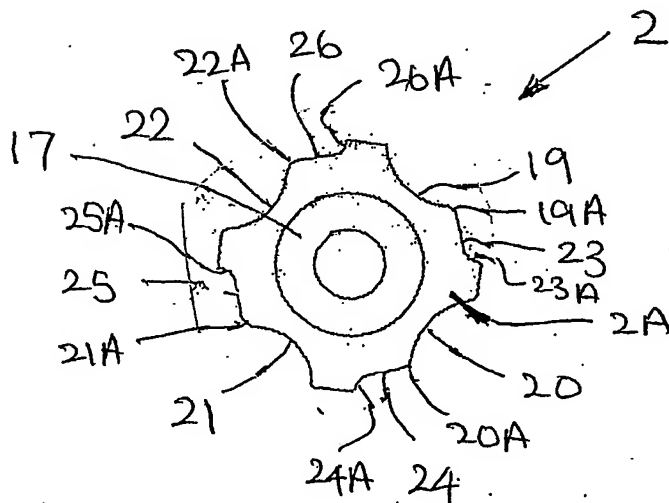


FIGURE 2

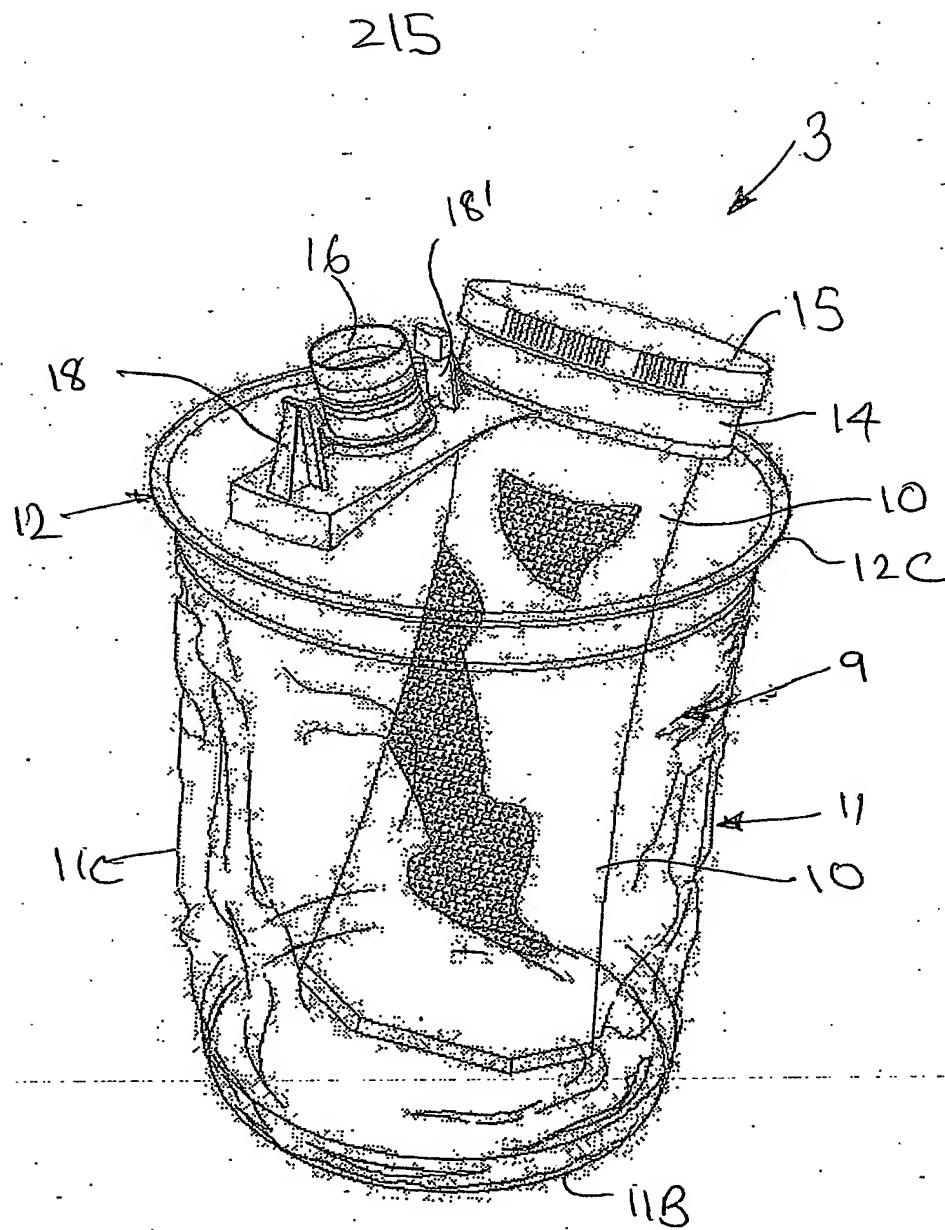


FIGURE 3

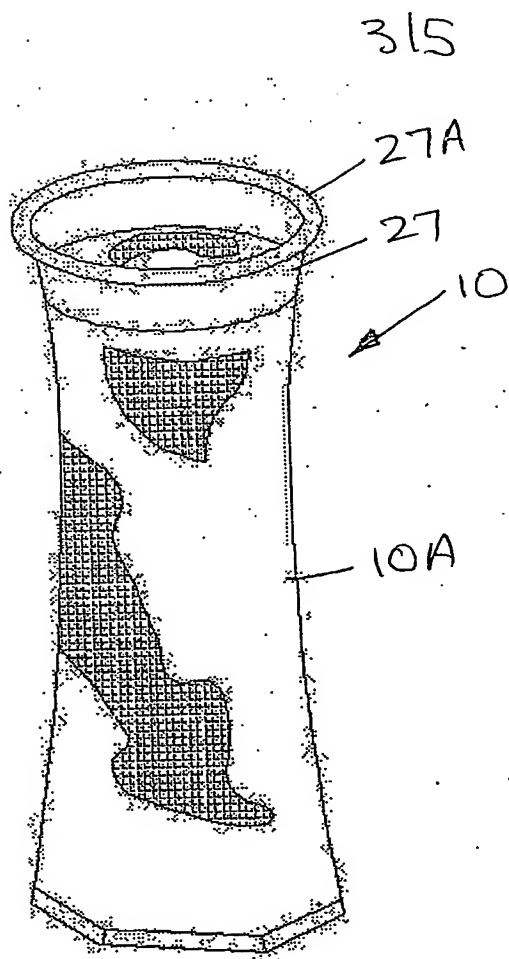


FIGURE 4



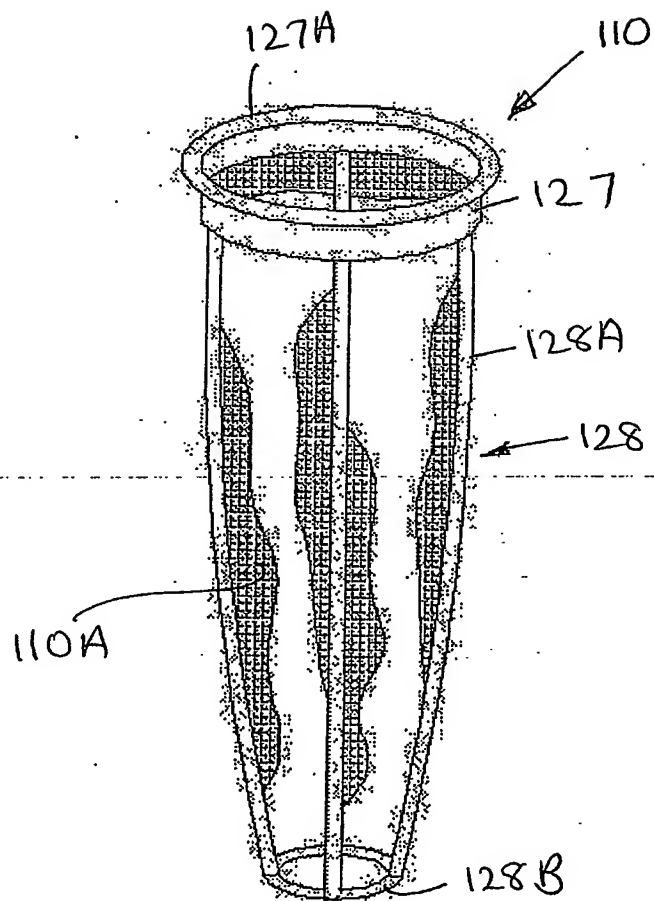


FIGURE 7

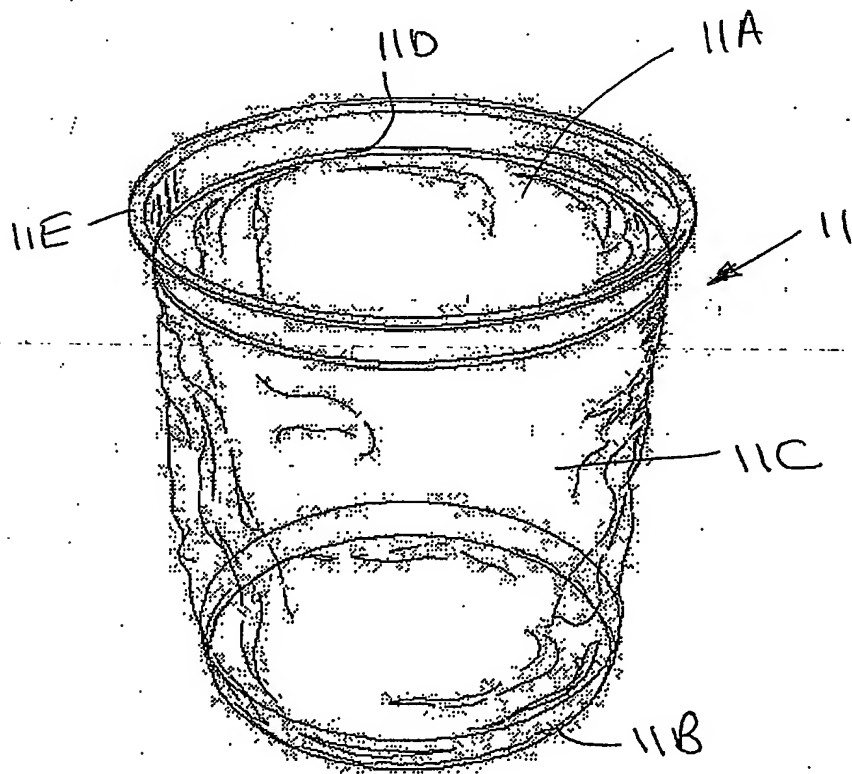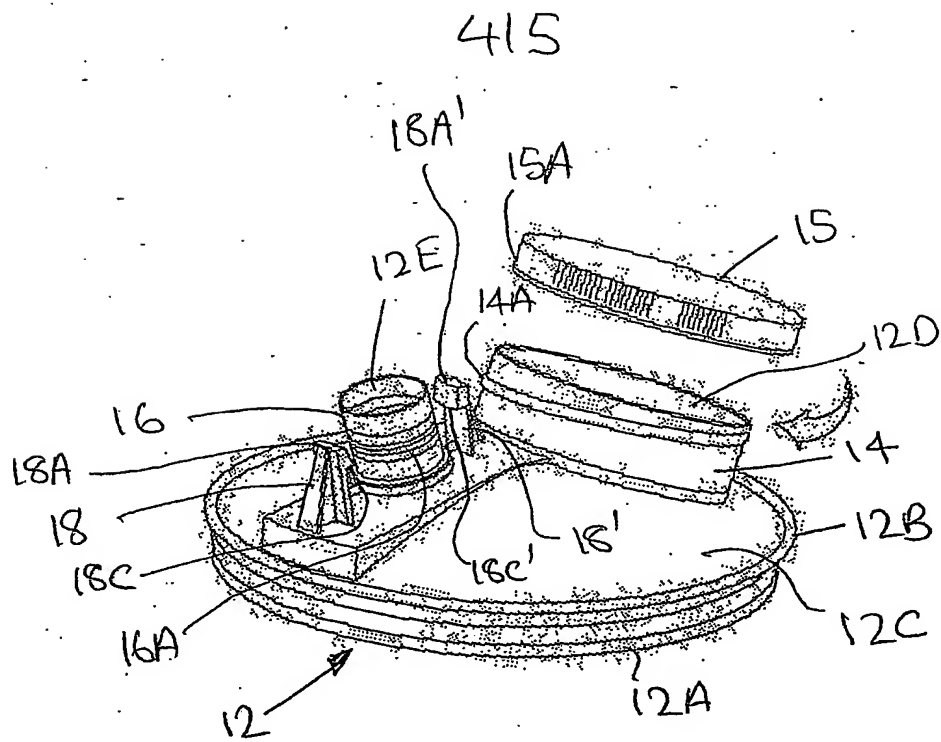

FIGURES

A perspective view of a container 109. The container has a cylindrical body 111 with a flared base 128B. A lid 115 is mounted on top, featuring a central opening 112C and a surrounding rim 112B. A central tube 118 extends from the lid down to the base. The tube has a top flange 118' and a bottom flange 118. A small component 112E is attached to the side of the lid. The container is shown with a dashed line 112A indicating a cross-section. Other labels include 116, 116A, 116B, 117, 118, 118', 118'', 119, 120, 121, 122, 123, 124, 125, 126, 127, 128A, 128B, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200.

FIGURE 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**